



# RP292 Rigging Rope Wrench (one way locking)


## Data Sheet




The Rigging Rope Wrench has been optimised for 12-13mm (1/2") rope making it the ultimate, lightweight rigging kit, when teamed with hollow-braids.



In addition to an audible click which acknowledges the location of the locking pin, the front of the pin head is marked with an indent, which allows the user to track the orientation of the locking pin, (without having to turn the device, to look at the pin-head).

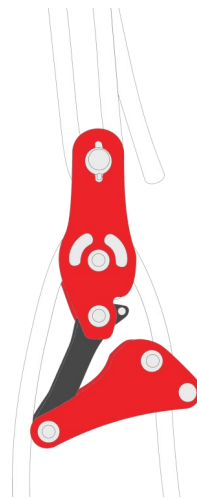

Disengaged whilst lifting load

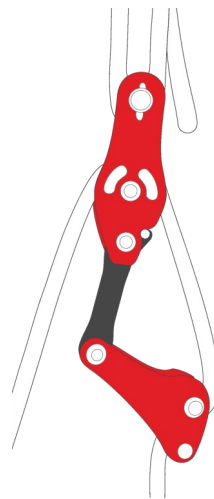


Engaged whilst lowering load



The RP292 Rigging Rope Wrench is a lowering device suitable for loads ranging from 20 to 120kg (44-264lbs).

The RP292 is fitted with a one-way locking wheel, which provides additional friction when lowering, allowing increased control of heavier loads. During lifting, the wheel runs freely.

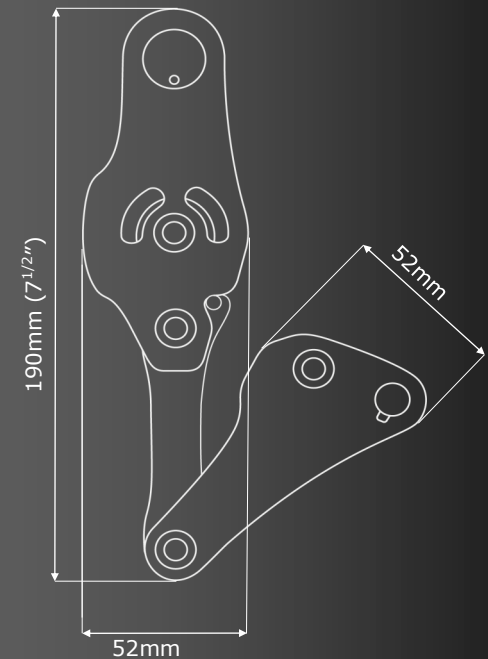

<b>Rope <math>\varnothing</math></b>	12-13mm (1/2")
<b>Unit Weight (Single Unit)</b>	475g (1lb)
<b>Packed Weight (Single Unit)</b>	727g (1.6lb)
<b>Body Material</b>	Aluminium
<b>MBS</b>	30kN (6744lbf)
<b>WLL</b>	20-120kg (44-264lbs)